




BRIA iPhone Configuration

Figure1: Home Screen



Step 1: click on the the “wrench” icon Settings on the bottom right corner of the screen to go to the and @Accounts.

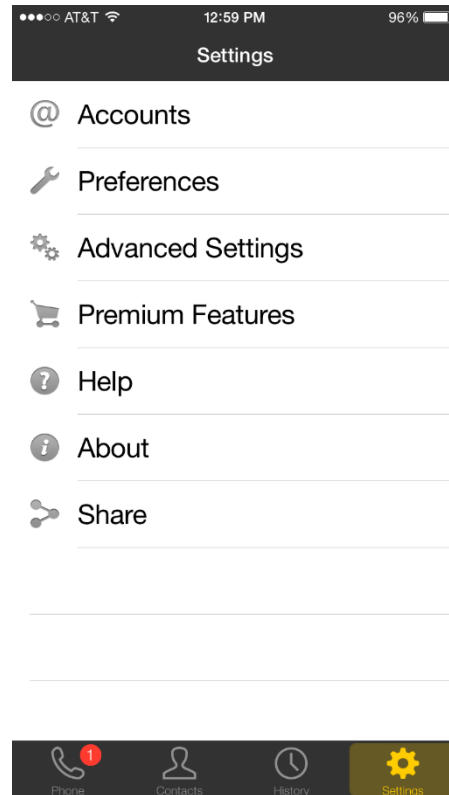

Figures 2 & 3: Accounts and Select Provider Screens

Step 2: click on the the “**plus**” + icon on the top right corner of the screen to add a new SIP Softphone account.

Step 3: click on the “**SIP – VoIP (SIP) - Calling**” to configure settings for your softphone

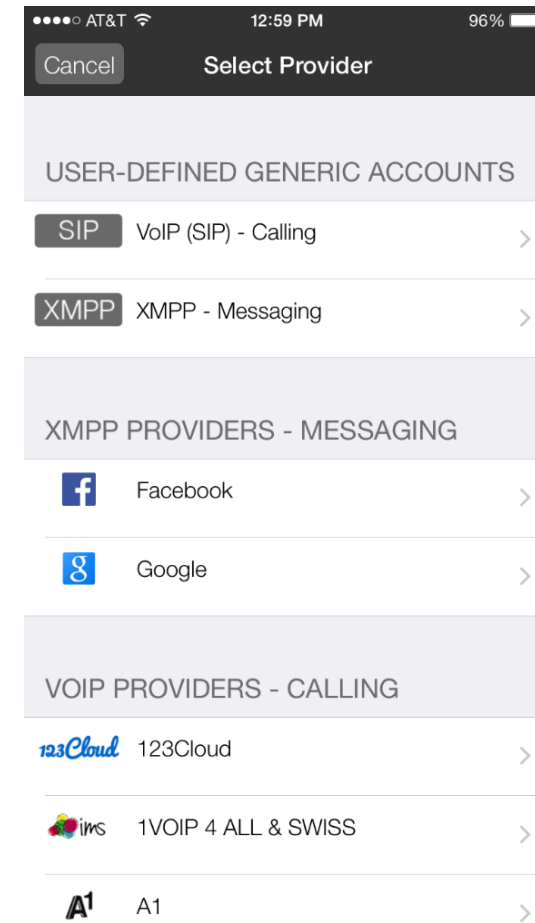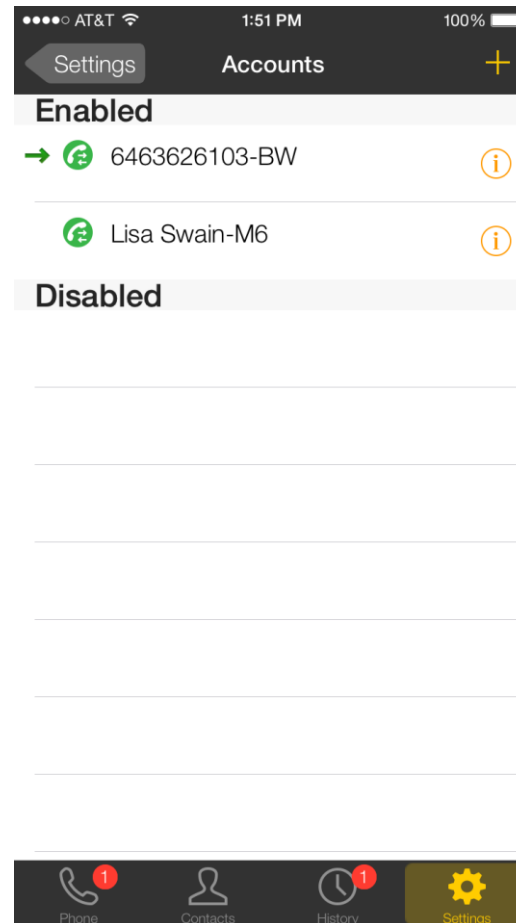

Figures 3 & 4: SIP Account Screens

Step 4: Fill in the info:

Account Name:
Can be anything!
Customer choice

Display As:
Customer Choice

User Name:
Line Port in BW, 1st half

Password:
BW Authentication
Password

Domain:
as.commx.net

Scroll down to Voice Mail and enter ***86**.

Step 5: Scroll down to **Account Advanced**

The screenshot shows the 'SIP Account' registration screen. At the top, there's a status bar with 'AT&T', '12:59 PM', and '96%' battery. Below the status bar, there's a navigation bar with 'Accounts' and 'SIP Account'. The main content area shows 'Account Status' as 'Not Registered' in red. Below this is a 'Register' button. The 'Account Name' field is filled with 'COMMX2224'. There's an 'Enabled' toggle switch. Below a 'USER DETAILS' section header, the 'Display as' field is filled with 'COMMX2224'. The 'Username' field is filled with 'Lisa-Bria-01'. The 'Password' field is masked with dots. The 'Domain' field is filled with 'as.commx.net'. At the bottom, there's a navigation bar with icons for Phone, Contacts, History, and Settings.

The screenshot shows the 'SIP Account' screen. At the top, there's a status bar with 'AT&T', '12:59 PM', and '96%' battery. Below the status bar, there's a navigation bar with 'Accounts' and 'SIP Account'. The main content area shows 'Username' as 'Lisa-Bria-01', 'Password' as masked dots, and 'Domain' as 'as.commx.net'. Below this is a 'VOICE MAIL' section with 'VM Number' as '*86'. There are three expandable sections: 'Dial Plan (Number Prefixes)', 'Account Specific Features', and 'Account Advanced'. At the bottom, there's a message: 'To modify Account Settings, please unregister first. For details see the Quick Help.' Below this is a navigation bar with icons for Phone, Contacts, History, and Settings.

Figure 5: Account Advanced Screen

Step 6:

Fill out the Out Proxy and
Auth name fields

The OutProxy is:
sbc.pressone.net

The Auth Name is:
BW User ID

Press **SIP Account** arrow to
go back and hit the **Save**
icon in the top right corner.
Enable slider to enable and
Register the Account

AT&T 1:20 PM 98%

SIP Account Account Advanced

ACCOUNT ADDITIONAL

Out. Proxy sbc.pressone.net

Auth Name COMMX2224

DTMF TYPE

Send DTMF using RFC 2833 >

MEDIA NETWORK TRAVERSAL

Suppress STUN Wi-Fi

Suppress STUN Mobile

Use ICE Wi-Fi

Use ICE Mobile

Phone Contacts History Settings